

## SERVICE

### 1713B TELEPHONE SETS

#### 1. GENERAL

- 1.01 Reissued to added nontechnical changes to Fig. 1 and 2.


**TABLE A**  
**POLARITY GUARD CONNECTIONS**  
**FOR 1713B TELEPHONE SETS**  
**(D-180229 KIT OF PARTS)**

LEAD	COLOR	REMOVE FROM	CONNECT TO	
		NET.	NET.	TERM BLOCK*
Line Switch	BR	C		4
Dial	BK	RR		3
Polarity Guard	R			3
	BK			4
	G		RR	
	W		C	

\*Components of polarity guard assembly.


**Note:** For use when specified by local instructions for end-to-end signaling installation.

SECTION 502-728-402

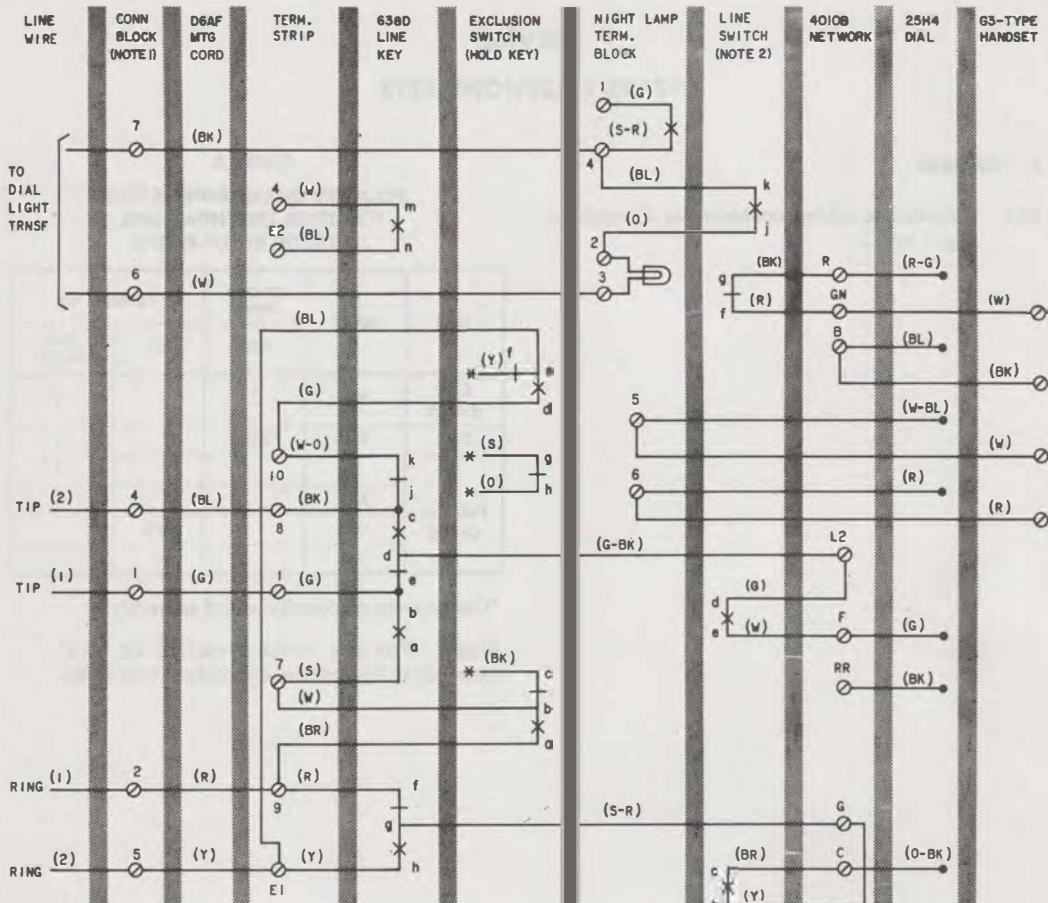

- NOTES:
1. IF RINGER IS REQUIRED, REPLACE CONNECTING BLOCK WITH SEPARATELY ORDERED EI-TYPE RINGER.
  2. LINE SWITCH SEQUENCE, HANDSET REMOVED:  
 bc - MAKES      ab - BREAKS  
 de - MAKES      fg - BREAKS  
 \* - INSULATED AND STORED

Fig. 1—1713B Telephone Set Connections With 25H4 Dial

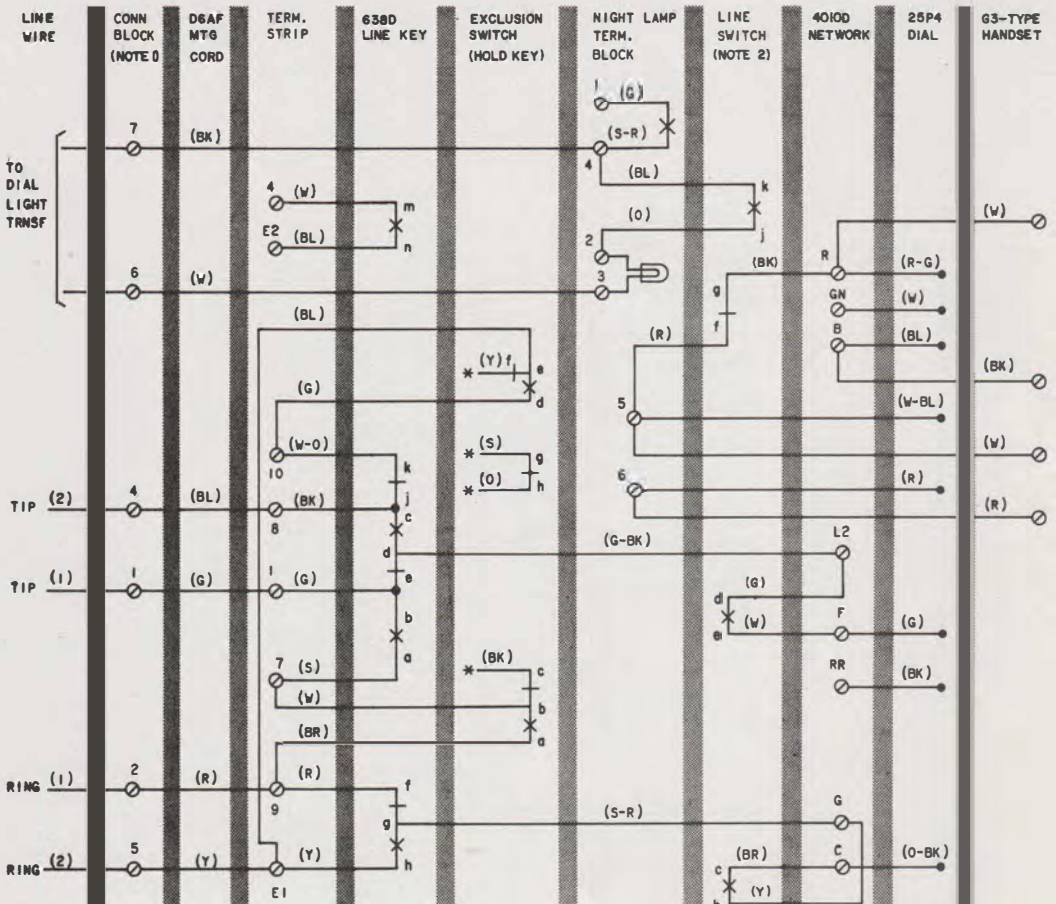

**NOTES:**  
 1. IF RINGER IS REQUIRED, REPLACE CONNECTING BLOCK WITH SEPARATELY ORDERED EI-TYPE RINGER.  
 2. LINE SWITCH SEQUENCE, HANDSET REMOVED:  
 bc - MAKES      ab - BREAKS  
 de - MAKES      fg - BREAKS  
 \* INSULATED AND STORED

Fig. 2—1713B Telephone Set Connections with 25P4 Dial