SERVICE 2558D TELEPHONE SETS

1. GENERAL

1.01 Reissued to:


- Change P-90D053 Guard Assembly to D-180190 Guard Assembly
- Show (BL) lead removed from later model ringers

TABLE A

POLARITY GUARD CONNECTIONS (D-180190 GUARD ASSEMBLY)

LEAD	COLOR	REMOVE FROM NET.	CONNECT TO	
			NET.	POLARITY
Line Switch	W	С	1111	S
Dial	BK	RR		Т
Polarity Guard	W G		C RR	

Note: For use when specified by local instructions for end-to-end signaling installations.

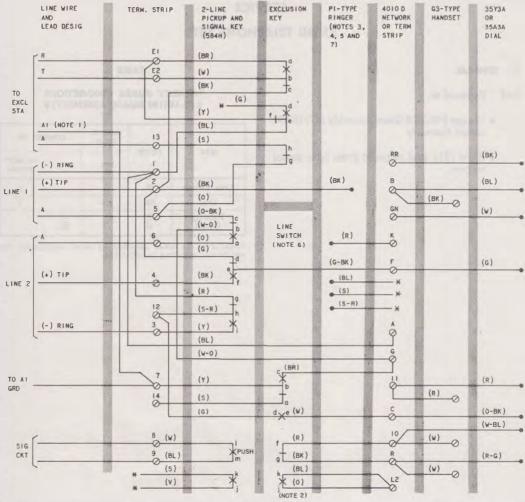

NOTES:

- I. PROVIDE AI GROUND AT EXCLUDED STATION OR CONNECT AS SHOWN.
- 2. CURRENT PRODUCTION SETS DO NOT HAVE CONTACTS j-k AND ASSOCIATED (0) AND (BL) LEADS.
- 3. RINGER CONNECTIONS PROVIDE FOR RINGING ON LINE 1. FOR RINGING ON LINE 2, CONNECT (BK) RINGER LEAD TO TERMINAL 4 AND (BL) STRAP FROM A OF NETWORK TO TERMINAL 3.

 4. SETS ARE FACTORY WIRED FOR BRIDGED RINGING SERVICE, CONNECTIONS FOR PIB SAME AS
- PIA RINGER. (BL), (S), AND (S-R) LEADS SHOWN INSULATED AND STORED ARE ON PIA ONLY.
- 5. TO SILENCE RINGER PERMANENTLY, REMOVE (BK) RINGER LEAD FROM TERMINAL 2, INSULATE AND STORE.
- 6. LINE SWITCH SEQUENCE. HANDSET REMOVED:
- bc-MAKES ab-BREAKS de-MAKES fg - MAKES
 - 7. (BL) LEAD HAS BEEN REMOVED FROM LATER MODEL RINGERS.
 - * INSULATED AND STORED

♦Fig. 1—2558D Telephone Set Connections (Factory Wired) ♦

Page 2 2 Pages