

SPEAKERPHONE SYSTEM—3-TYPE

752-TYPE TELEPHONE SETS

CONNECTIONS AND MAINTENANCE

1. GENERAL

1.01 This section contains connection information for the 752-type telephone set for use with the 3-type speakerphone system.



Refer to Division 512 for connections if 3-type speakerphone is to be provided in conjunction with 1A home interphone.

1.02 This section is reissued to:

- Change section reference in read note, 1.03, and 3.01.
- Change callout, Fig. 1.
- Add 55A (MD) and 55A* control unit, Fig. 2.

1.03 The 752-type telephone set is equipped with loudspeaker, transmitter, and speakerphone ON-OFF and volume controls. No conversion or wiring changes are necessary for speakerphone operation. Refer to Division 502 for telephone set internal connections.

2. CONNECTION INDEX

Fig. 2—752-Type Telephone Set, Connections to 3-Type Speakerphone System

3. MAINTENANCE

3.01 Refer to Division 502 for maintenance information for the 752-type telephone sets. Refer to Division 512 for speakerphone system requirements and maintenance information.

3.02 Maintenance of the speakerphone components of these sets (Fig. 1) is limited to replacement of defective units.

123-TYPE TELEPHONE SETS
SPEAKERPHONE SYSTEM—3-TYPE
CONDITIONS AND MAINTENANCE

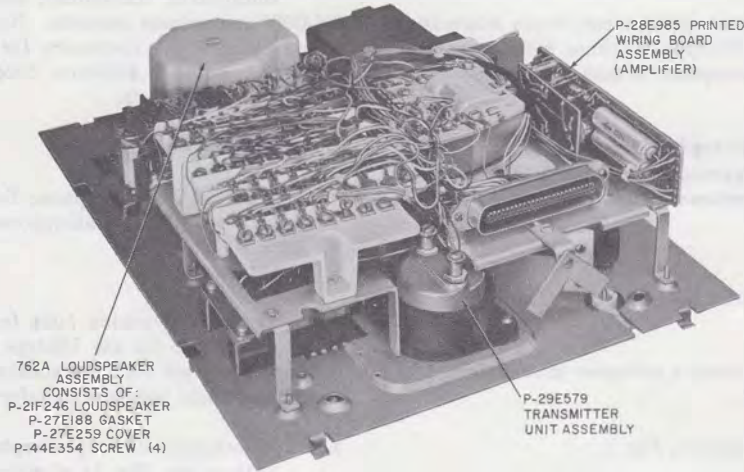


Fig. 1—Speakerphone Components

NOTES:

1. CONNECT FOR BUSY LAMP CONTROLLED BY SPEAKERPHONE CONTROL UNIT ONLY; ADD STRAP TERMINAL 19 TO 21(55B) OR 26 TO 29(55A*).
2. CONNECT SP2 LEAD TO TERMINAL 30(55B) OR 24(55A) CONTROL UNIT IF REDUCED LOUDSPEAKER VOLUME IS DESIRED.
3. MODIFIED UNITS ARE IDENTIFIED BY AN ASTERISK FOLLOWING THE CODE.
4. INTERCONNECTIONS MAY BE MADE USING AN A25B CONNECTOR CABLE WHEN THE 55-TYPE CONTROL UNIT IS LOCATED AT THE KEY EQUIPMENT.

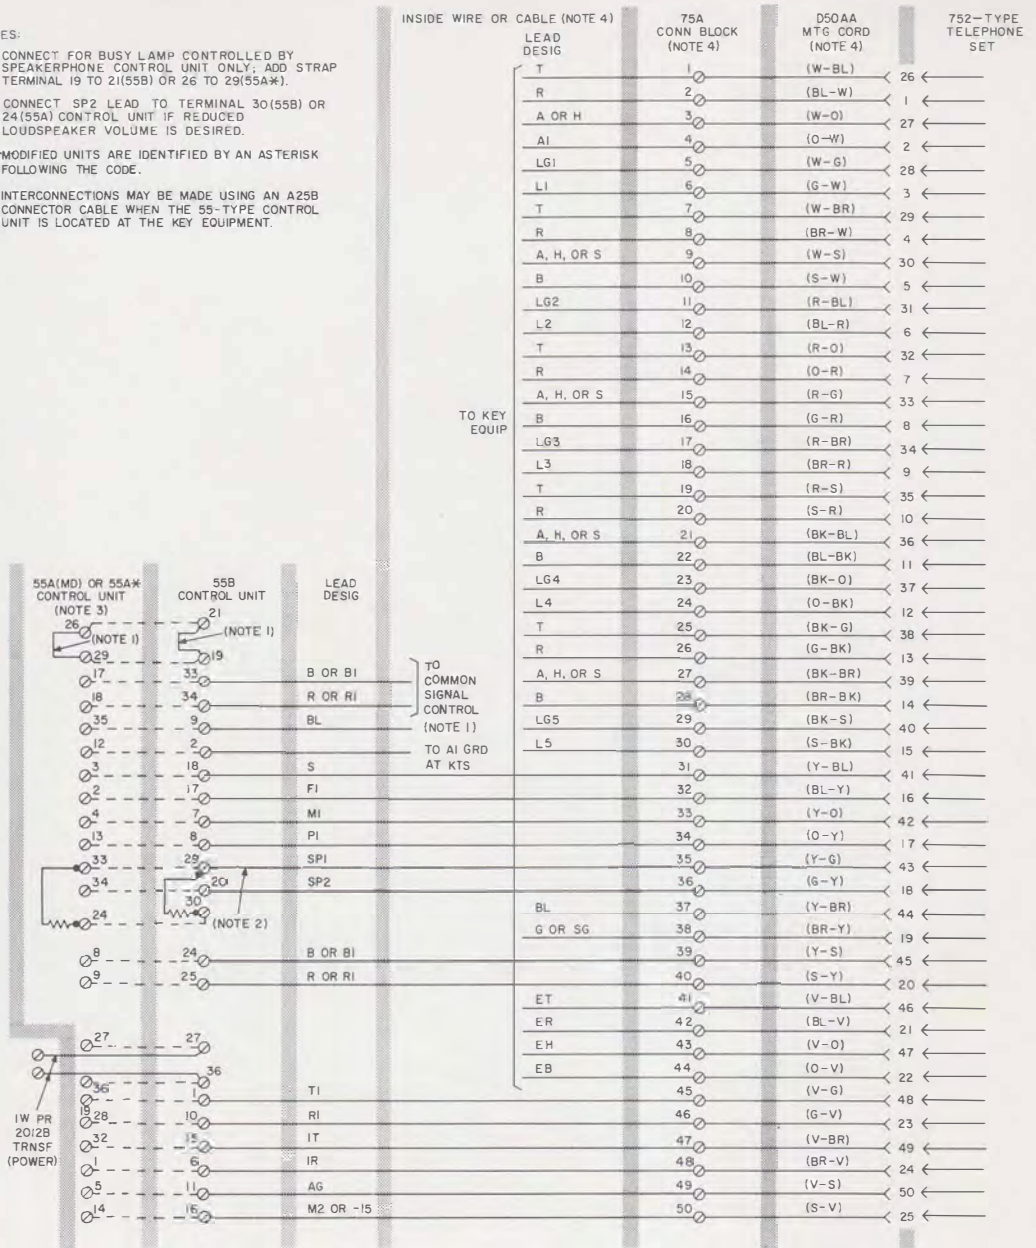


Fig. 2—752-Type Telephone Set, Connections to 3-Type Speakerphone